

No Mixing Anymore

EASY JET SPEED MORTAR 5



USE

The extra rapid set mortar without mixing or kneading
 To fix various things such as a pole or a sign (a bag becomes approximately 10 liter jet speed mortar)
 To fill up a pot hole
 For Emergency work



PACKAGING

20kg in Poly bag



How to Use

1. Dig a hole
2. Put a thing that you want to fix to the ground into the hole then pour water there.
3. Pour EASY JET SPEED MORTAR till the hole is full. Pushing it with a stick to have EASY JET SPEED MORTAR 5 absorb water.
4. Level the surface with a trowel. (In case water doesn't come out of the surface, sprinkle water)




Physical Property

EASY JET SPEED MORTAR 5 is cured in 10 minutes at 20 degree celsius

compressive strength (N/mm ²)	age	temperatur	5 degree celsius	20 degree celsius	30 degree celsius
	3 hours		2.4	3.0	3.8
	1 day		6.6	5.5	4.6
	3 days		8.2	8.3	8.9
	7 days		10.3	14.9	17.2
	28 days		21.4	30.2	34.2

flexual strength (N/mm ²)	age	temperature	5 degree celsius	20 degree celsius	30 degree celsius
	3hours		1.20	1.72	1.73
	1 day		2.53	1.96	1.92
	3days		2.96	2.81	2.77
	7days		3.18	3.45	4.09
	28 days old		5.23	6.20	6.44

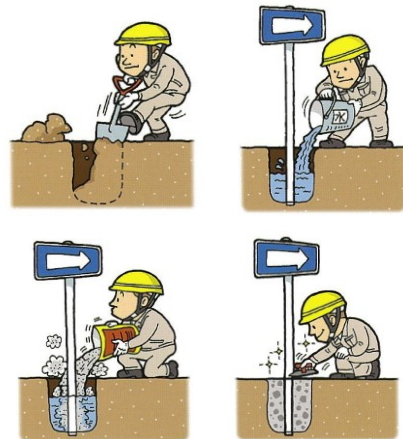

Precaution

- 1 This mortar is EXTRA rapid set. Be careful of the heat.
- 2 Placing of a large amount of Easy Jet Speed Mortar 20 may cause a crack on the surface due to the reaction heat. Ask our engineer first.
- 3 Its curing may be slowed at the temperature below 5 degree celsius. This product is frozen at the temperature below 0 degree celsius.
- 4 It may cause a crack on the surface to be exposed to direct daylight and wind soon after placing. Curing sheets are recommended during curing.
- 5 Away from heat and moisture, preserve in doors.